





由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

环保要求 RoHS 2.0


由 Autodesk 教育版产品制作

NOTES:
 1. MATERIAL:
 HOUSING:THERMOPLASTIC(UL94V-0) NATURE
 ACTUATOR:THERMOPLASTIC(UL94V-0) BLACK
 TERMINAL:PHOSPHOR BRONZE PLATED GOLD 1u" FOR SOLDERING
 AREA AND CONNECT AREA, PLATED NI MIN 30u" FOR
 ALLOVER UNDER.
 FITTING NAIL:PHOSPHOR BRONZE MATTE TIN MIN 80u" PLATED FOR
 ALLOVER PLATED NI MIN 30u" FOR ALLOVER UNDER.
 2. SPECIFICATION
 CURRENT RATING: 0.5A 50VAC/DC
 CONTACT RESISTANCE: 40mΩ MAX
 INSULATION RESISTANCE: 100MΩ MIN AT 500V DC
 OPERATING TEMPERATURE RANGE: -40°C TO +85°C
 WITHSTANDING VOLTANG: 500V AC/minute

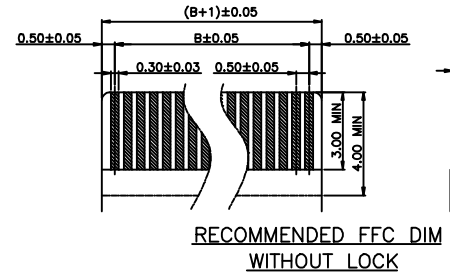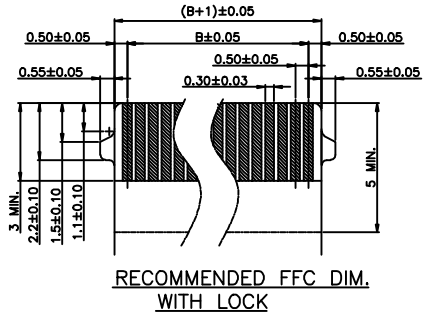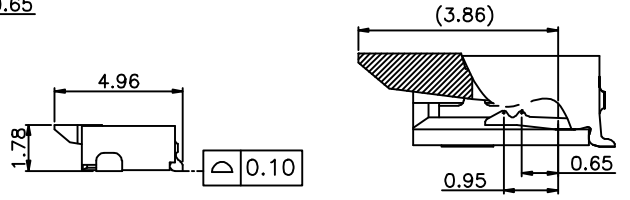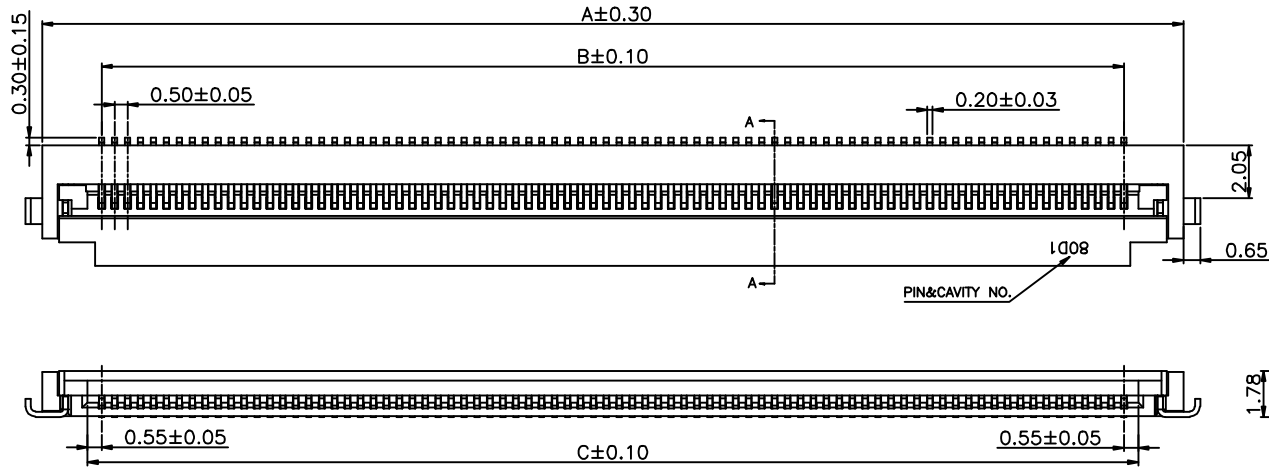

料号: 5001-FPC 05 18-**-R 1-00
 JM FPC CONNECTOR SERIES
 PITCH: 0.5
 HIGH: 1.78
 ALTERNATE
 PACKING: R: 卷
 PIN

PIN数	A	B	C
60	34.1	29.5	30.6
68	38.1	33.5	34.6
80	44.1	39.5	40.6

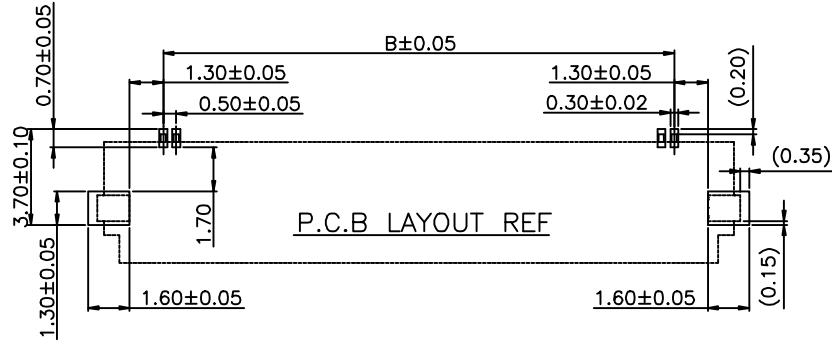

CUSTOMER DRAWING

深圳市文章济美科技有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	APPROVED BY	DATE	TITLE
X.X ±0.30			FPC CONN. 0.5P H1.8
X.XX ±0.20	CHECKED BY	DATE	FLIP TYPE 成品图
X.XXX ±0.10	DRAWN BY	DATE	DOCUMENT NO
ANG. ±0°30'			PAGE 1

UNIT PPM	SIZE A4	DRAWING NO	REV A	SHEET 1/1	SCALE 1:1
----------	---------	------------	-------	-----------	-----------

由 Autodesk 教育版产品制作