


Notes:
 Rated current:0.75A
 Withstand Voltage:500V AC/DC
 Contact Resistance:20MΩ Max
 Insulation Resistance:1000MΩ Min
 Operating Temperature:-40 °C TO +105 °C

Contact Material:Phosphor Bronze
 Insulator Material: PA6T UL94V-0 BK

PCB LAYOUT

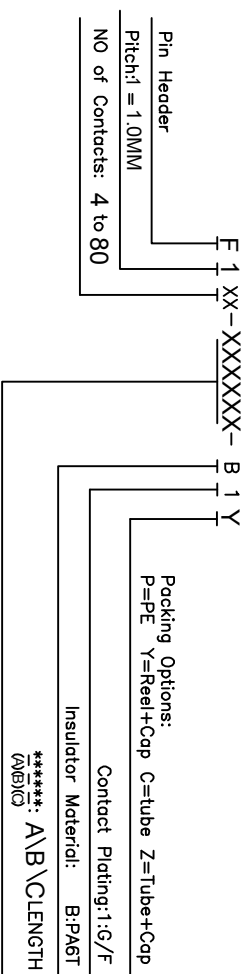

深圳市文章济美科技有限公司

DESCRIPTION: FHL.0*2.0 2*NP SMT

PART NO: REC:1.0
 CUSTOMER NO: SIZE:A4

DRAWING:

MAO ZI HAO

GENERAL TOLERANCE

.X: ±0.30
 .XX: ±0.20
 .XXX: ±0.10

.X*: ±2°
 .XX*: ±1°
 .XXX*: ±5°

CHECKED:

YAO HUI SONG

UNIT: MM

PROJECTION

APPROVAL:

HAN SONG

SCALE: N/A

SHEET: 1/1

DESCRIPTION:

FHL.0*2.0 2*NP SMT

PART NO:

REC:1.0

CUSTOMER NO:

SIZE:A4

NO. DATE DESCRIPTION APPROVAL

1 2 3 4 5 6 7 8