

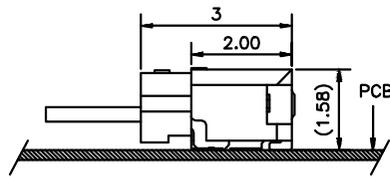



环保物料








MATED CONDITION



SECTION A-A
SCALE 2:1

Specifications

Voltage Rating: 30V AC/ DC
 Current Rating: 0.2A AC/DC
 Withstanding Voltage: 200V AC/Minute
 Insulation Resistance: 100MΩ Min.
 Temperature Range: -25° C~+85° C
 Contact Resistance: 30mΩ Max.
 Pin Material: Brass/Gold-Finish
 Solder Tabs: Brass /Tin-plated
 Material: LCP ,UL94V-0
 Q'ty/Reel: 4500PCS

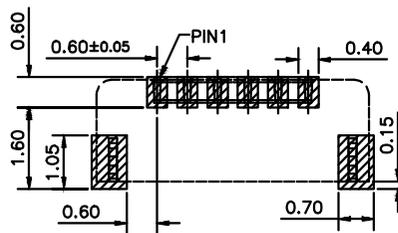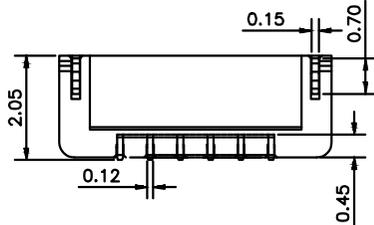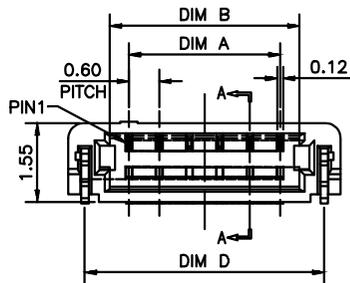

RECOMMEND PCB LAYOUT
 GENERAL TOLERANCE ±0.05

CKT	DIM A	DIM B	DIM C	DIM D
04	1.80	2.56	4.20	3.55
06	3.00	3.76	5.40	4.75
07	3.60	4.36	6.00	5.35
08	4.20	4.96	6.60	5.95
10	5.40	6.16	7.80	7.15
12	6.60	7.36	9.00	8.35
14	7.80	8.56	10.20	9.55
16	9.00	9.76	11.40	10.75

				一般公差 GENERAL TOLERANCE				料号 PART NO							
				.X ±0.3				深圳市文章济美科技有限公司							
				.XX ±0.2											
				.XXX ±0.1				品名 TITLE							
2015/05/30	A	B	修改图框格式					0.60mm Crimp Style connectors							
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	角法 PROJECT	核准 APPD	审核 CHK	绘图 DR	日期 DATA	单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
								Rodney	兰雄	刘小菊	2015/05/30	MM	1/1		B