
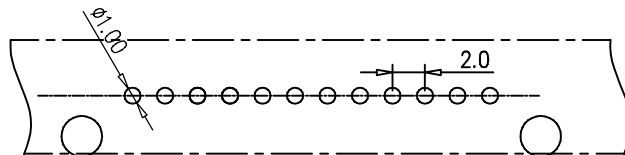

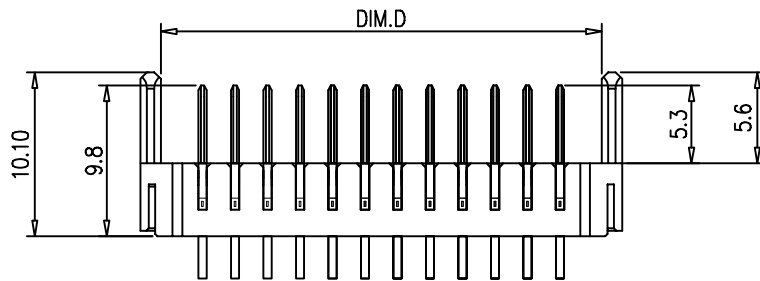


REV.	DESCRIPTION	DRAW.	DATE.

NOTE:

1. MATERIAL:
 - 1.1 HOUSING: PA, UL 94V-0
 - 1.2 TERMINAL: C2680
2. FINISH:
 - 2.1 TERMINAL: NICKEL 50 μ"MIN UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA. OR Tin ON THE SOLDERING AREA.
3. PRODUCT SPECIFICATION
 - 3.1 CURRENT RATING : 5A
 - 3.2 VOLTAGE RATING : 30V AC
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
 - 3.4 INSULATION RESISTANCE: 100MΩ min.
 - 3.5 CONTACT RESISTANCE: 30mΩ Max.
 - 3.6 Operating Temperature: -40° ~105°

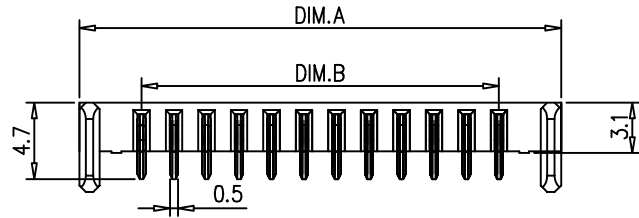

RECOMMENDED PCB LAYOUT
T=1.2MM, TOLERANCES±0.05MM

Pos.No.	P/N.	DIM.A	DIM.B	DIM.C	DIM.D
2Pin	5001-DP2045C-02MT-02	9.65	2.00		7.15
3Pin	5001-DP2045C-03MT-02	11.65	4.00		9.15
4Pin	5001-DP2045C-04MT-02	13.65	6.00		11.15
5Pin	5001-DP2045C-05MT-02	15.65	8.00		13.15
6Pin	5001-DP2045C-06MT-02	17.65	10.00		15.15
7Pin	5001-DP2045C-07MT-02	19.65	12.00		17.15
8Pin	5001-DP2045C-08MT-02	21.65	14.00		19.15
9Pin	5001-DP2045C-09MT-02	23.65	16.00		21.15
10Pin	5001-DP2045C-10MT-02	25.65	18.00		23.15
11Pin	5001-DP2045C-11MT-02	27.65	20.00		25.15
12Pin	5001-DP2045C-12MT-02	29.65	22.00		27.15
13Pin	5001-DP2045C-13MT-02	31.65	24.00		29.15
14Pin	5001-DP2045C-14MT-02	33.65	26.00		31.15
15Pin	5001-DP2045C-15MT-02	35.65	28.00		33.15

深圳市文章济美科技有限公司
Shenzhen Wenzhang Jimei Technology Co., Ltd.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.5 X.x ±0.35 X.xx ±0.25 ANGULAR ±2°	DESIGN	B.K	DATE	01/01'20	TITLE:
	APPROVED		DATE		P2.0 电池座公头 (端子凹进 密封胶.3)
	PART NO	5001-DP2045C-**MT-02	REV: 01	SCALE: 1:1	UNIT: MM
	DRAWING NO		SIZE: A4	SHEET: 1/1	