
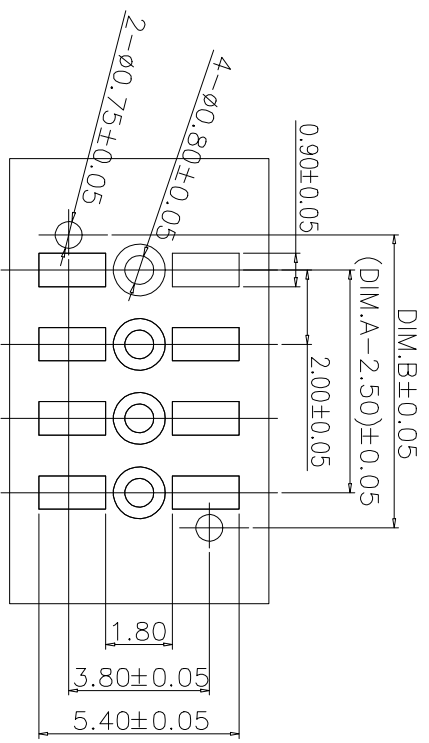
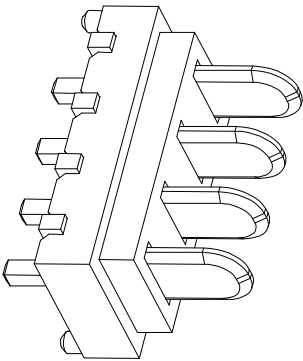




RoHS
Compliant

结构图面


REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
1	原始图面				160506

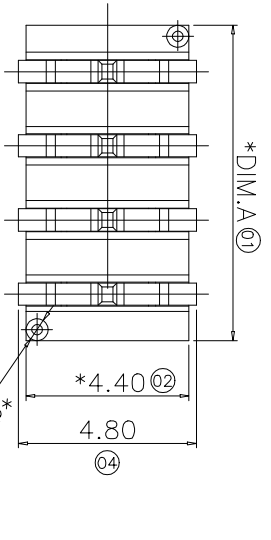

P.C.B LAYOUT
TOLERANCE: ±0.05

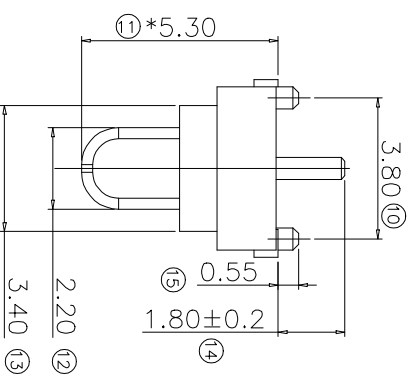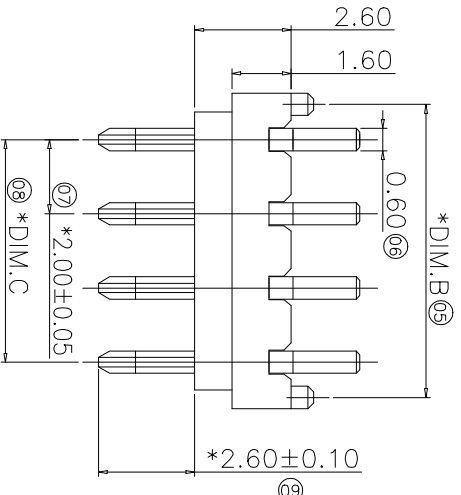

P / N	Dim. A	Dim. B	Dim. C
03pin	6.50	5.90	4.00
04pin	8.50	7.90	6.00
05pin	10.50	9.90	8.00
06pin	12.50	11.90	10.00
07pin	14.50	13.90	12.00
08pin	16.50	15.90	14.00



- NOTES:
- MATERIAL:
HOUSING: ICP 30% G/F UL94 V-0
COLOR: BLACK
 - CONTACT: COPPER ALLOY T=0.60mm
2. FINISH:
CONTACT: 1μ" GOLD PLATING ON CONTACT AREA
G/F: GOLD PLATING ON SOLDER TABS
50μ" MIN. NICKEL UNDERPLATING OVER ALL

QUALITY STANDARDS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAFT	DRAFT ANGLE	SURFACE FINISH	MATERIAL	SPEC.	DATE	REVISION	DATE	DRAWN	CHECKED	DATE	APPROVED
	MM	INCH												
▽-0	.1	±0.25	.1	⑤	—									
▽-0	.1X	±0.15	.1X	⑥	—									
▽-0	.1X	±0.05	.1X	⑦	—									

DEPT. ENGINEERING
MKTG. DIV.
MFG. DIV.
QUALITY DIV.
SUPPORT DIV.

DATE: 1/1

SCALE: 1:1

TITLE: Battery PH2.0 H=5.3mm公座

深圳市文章济美科技有限公司